

MoviSight

MS-7TPH4203DA

Explosion Proof Bullet Thermal



Key Features

- Uncooled VOx Micro bolometer with 400×300 resolution
- 8/15/25/35/50 mm fixed lens optional
- NETD ≤ 40mK
- Support temperature monitoring exception alarm
- Support 3 temperature measurement rule types (spot, line, area)
- Support human/vehicle detection
- Intelligent analysis: intrusion, single line crossing, double line crossing, loitering, wrong-way, people counting, enter area, leave area
- Material: 316L Stainless steel
- IP68

Specification




| Thermal Camera | | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------|--------------------|-------------------|---------------------|
| Detector Type | Uncooled VOx Micro bolometer 400×300 | | | | |
| Resolution | Sensor is 400×300. Image can be scaled up to 704×576 | | | | |
| Pixel size | 17μm | | | | |
| Spectral Range | 8 to 14μm | | | | |
| Thermal Sensitivity (NETD) | ≤ 40mK | | | | |
| Lens Type | Fixed focal length | | | | |
| Focus Control | Manual focus | | | | |
| Focal Length | 8mm | 15mm | 25mm | 35mm | 50mm |
| F No. | F1.0 | F1.0 | F1.0 | F1.0 | F1.0 |
| Angle of View | H: 46°, V: 35.3° | H: 25.5°, V: 19.2° | H: 15.4°, V: 11.6° | H: 11°, V: 9° | H: 7.7°, V: 5.8° |
| Detection Distance (Fire: 1m×1m) | 235m (771ft) | 441m (1,446.9ft) | 735m (2,411.4ft) | 1,029m (3,376ft) | 1,417m (4,649ft) |
| Detection Distance (Humans: 1.8×0.5m) | 235m (771ft) | 441m (1,446.9ft) | 735m (2,411.4ft) | 1,029m (3,376ft) | 1,417m (4,649ft) |
| Detection Distance (Vehicles: 4×1.5m) | 722m (2,368.8ft) | 1,353m (4,439ft) | 2,255m (7,398.3ft) | 3,137m (10,292ft) | 4,510m (14,796.6ft) |
| Recognition Distance (Humans: 1.8×0.5m) | 59m (193.6ft) | 110m (360.9ft) | 184m (603.7ft) | 257m (843.2ft) | 368m (1,207.3ft) |
| Recognition Distance (Vehicles: 4×1.5m) | 180m (590.6ft) | 338m (1,109ft) | 564m (1,850.4ft) | 789m (2,588.6ft) | 1,127m (3,697.5ft) |
| Note: The detection ranges are calculated with Johnson's criteria and vary in different weather conditions. | | | | | |
| *Product performance is based on testing in a controlled environment. Your results may vary due to several external and environmental factors. | | | | | |
| Video and Audio | | | | | |
| Main Stream | 704×576 @25/30fps | | | | |
| Sub Stream | CIF @25/30fps | | | | |
| Bit Rate Control | CBR/VBR | | | | |
| Bit Rate | Main stream:100Kbps to 6Mbps, Sub stream: 10Kbps to 1.5Mbps | | | | |
| Region of Interest | Off / On (8 Zone, Rectangle) | | | | |
| Smart Encode | Support | | | | |
| Image | | | | | |
| Image Setting | Brightness, Sharpness, Contrast | | | | |
| Mirror | Support | | | | |
| Pseudo-color Setting | White-hot/Black-hot/Rainbow/Ironbow etc. up to 17 modes | | | | |
| Privacy Masking | Off / On (5 Area, Rectangle) | | | | |
| Flat-Field Calibration | Support | | | | |
| Noise Reduction | 2D/3D DNR | | | | |
| Privacy Masking | Support | | | | |
| Smart Function | | | | | |
| Smart Alarm | Motion detection, I/O alarm, Disk alarm, IVS alarm, Temperature detection & alarm | | | | |

MoviSight

| | |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Intelligent Functions | Human detection, Vehicle detection |
| Intelligent Analysis | Intrusion, Single line crossing, Double line crossing, Loitering, Wrong-way, Enter area, Leave area Support alarm triggering by specified target types (human and vehicle), People counting |
| Temperature Detection | |
| Temperature Detection | 3 temperature measurement rule types, 20 rules in total, 1 full screen, 19 others (spot, areas, line). |
| Temperature Alarm | Temperature difference alarm, Threshold alarm, Temperature rise alarm |
| Accuracy | ±2°C (35.6°F) / ±2% |
| Response Time | ≤ 30ms |
| Temperature Range | -20°C to 150°C (-4°F to 302°F) |
| Network | |
| Protocols | IPv4/IPv6, HTTP, RTSP/RTP/RTCP, TCP/UDP, DHCP, DNS, PPPOE, SMTP, 802.1x |
| Interoperability | ONVIF, CGI, SDK |
| Web Viewer | <IE11, Chrome, Firefox, Microsoft Edge |
| Web Language | English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian |
| Interface | |
| Network Interface | 1 Ethernet (10/100 Base-T) RJ-45 Connector |
| Audio Interface | 1ch input, 1ch output |
| Alarm Interface | 2ch input, 1ch output |
| RS485 | Support |
| Reset Button | Built-in |
| SD Card Slot | Built-in Micro SD card slot, up to 256GB |
| Electrical | |
| Power Supply | 100 to 240 VAC |
| Power Consumption | Max 25 W |
| Working Temperature | -40°C to 60°C (-40°F to 140°F) |
| Storage Conditions | 0 to 90% RH |
| Certifications | CE/FCC |
| Ingress Protection | IP68 |
| Casing | SUS316L |
| Dimensions | 464 × 166 × 171mm (18.27 × 6.54 × 6.73 inch) |
| Net Weight | 10 kg |
| Ordering Information | |
| Model | Description |
| SN-TPH4203DA-F08 | Focal Length: 8mm |
| SN-TPH4203DA-F15 | Focal Length: 15mm |
| SN-TPH4203DA-F25 | Focal Length: 25mm |
| SN-TPH4203DA-F35 | Focal Length: 35mm |
| SN-TPH4203DA-F50 | Focal Length: 50mm |

MoviSight

Dimensions (mm)

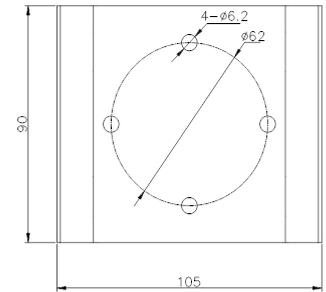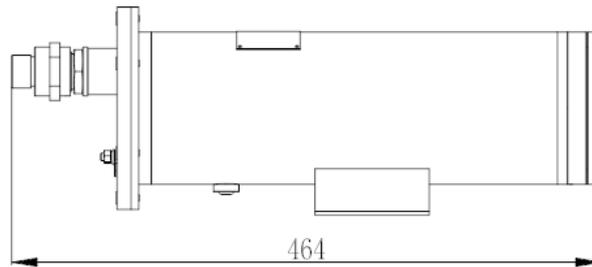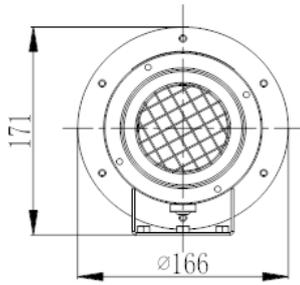

Accessories

Optional:



MS-7BK401A-SS
Wall Mount



MS-7BK400-SS(P/F/
D) Junction Box



MS-7CPL10A-SS
Washing Tank



Flexible Tube